




C 150 H
C 150 H x4
C 200 H COMPACT
C 200 H
C 200 H x4
C 250 H
C 250 H x4



DIMENSIONS (mm)	C 150 H	C 150 H x4	C 200 H COMPACT	C 200 H	C 200 H x4	C 250 H	C 250 H x4
A	1990	2020	2010	2050	2080	2150	2120
B	220	250	205	245	270	280	320
C	215	215	295	310	310	390	390
D	-	-	1375	1375	1392	1375	1392
E (narrow axle)	1305	1305	1375	1460	1460	1510	1510
F (wide axle)	-	-	-	1782	1782	1810	1810
G	2550	4000	2800	2800	4400	2800	4400
H	2350	2550	2600	2600	2900	2600	2900
I	100	100	100	100	100	130	130
J	35	35	40	40	40	45	45
K	500	500	610	610	610	615	615
L	3645	3645	4240	4240	4240	4245	4245
M	390	390	580	580	580	580	580
N	1740	1740	1850	1850	1850	1850	1850
O	1000	1000	1200	1200	1200	1200	1200
P	4250	5700	4700	4700	6300	4700	6300
Q	10°	10°	13°	13°	13°	13°	13°

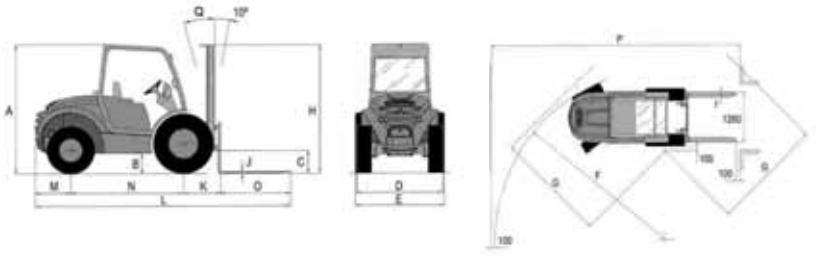

マストタイプ	Maximum lifting height (mm) マスト最高高さ	Front axle 前輪アクスル	Free lift (mm) フリーリフト	H マスト格納時の機械高さ (mm)				マスト伸長時の機械高さ (mm)				最高高さでのリフト能力 (Kg)						
				C 150 H	C 200 H COMPACT	C 200 H	C 250 H	C 150 H	C 200 H COMPACT	C 200 H	C 250 H	C 150 H	C 200 H COMPACT (narrow axle)	C 200 H (narrow axle)	C 200 H (wide axle)	C 250 H (narrow axle)	C 250 H (wide axle)	
C 200 / 250 H	Duplex (Std.)	3300	Narrow /Wide (op.)	120	-	-	2395	2460	-	-	4150	4215	-	-	2000	2000	2500	2500
	Duplex	2600	Narrow /Wide (op.)	120	-	2025	2045	2110	-	2430	3450	3515	-	2000	2000	2000	2500	2500
	Duplex	3600	Narrow /Wide (op.)	120	-	-	2545	2610	-	-	4450	4515	-	-	2000	2000	2300	2400
	Duplex	4500	Wide	120	-	-	2995	3060	-	-	5350	5415	-	-	-	1800	-	2100
	Triplex (free lift)	3700	Narrow /Wide (op.)	1200	-	2025	2045	2120	-	4570	4590	4665	-	2000	1800	2000	2200	2300
	Triplex (free lift)	4300	Wide	1330	-	-	2245	2320	-	-	5230	5300	-	-	-	1800	-	2100
C 150 H	Triplex (free lift)	5400	Wide	1680	-	-	2610	2685	-	-	6295	6370	-	-	-	1100	-	1100
	Duplex (Std.)	2660	-	0	1975	-	-	-	3285	-	-	-	1500	-	-	-	-	-
	Duplex	3300	-	0	2325	-	-	-	3925	-	-	-	1350	-	-	-	-	-
	Duplex (free lift)	2600	-	1360	1975	-	-	-	3270	-	-	-	1500	-	-	-	-	-
Triplex (free lift)	4000	-	1360	1975	-	-	-	4670	-	-	-	1200	-	-	-	-	-	

TECHNICAL SPECIFICATIONS

	C 150 H / C 150 H x4	C 200 H COMPACT / C 200 H / C 200 H x4	C 250 H / C 250 H x4
リフト能力 (重心位置 500 mmにて) Kg	1500	2000	2500
リフト高さ (Standard duplexマスト) mm	2660	3300	3300
エンジン Diesel (C 150/200 H / Turbo diesel (C 250 H))	KUBOTA V 1505-E2B	ISUZU 4LE2	KUBOTA V2003T
Power acc./DIN 6270 B (KW/HP)	23.5 / 32 (2600 rpm)	34.5/46 (2700 rpm)	42.6 / 57.88 (2700 rpm)
Power acc./DIN 70020 (KW/HP)	25.6 / 34.8 (2600 rpm)	37.5/51 (2700 rpm)	46.3 / 62.9 (2700 rpm)
N° of cylinders シリンダー数	4	4	4
Cooling system 冷却システム	Water.	Water.	Water.
Traction 駆動	4x2 / 4x4	4x2 / 4x2 / 4x4	4x2 / 4x4
Transmission	可変ポンプ & 自動制御 電動ギアインバーター、2速 ジョイスティック、インチングペダル	可変ポンプ & 自動制御 電動ギアインバーター、2速 ジョイスティック、インチングペダル	可変ポンプ & 自動制御 電動ギアインバーター、 インチングペダル
運転重量Kg (タンクに給油後)	2600	3800 (4x2) / 3900 (4x4)	4200 (4x2) / 4300 (4x4)
登坂能力 (負荷時)	25%	38% (4x2) / 37% (4x4) / 42% (COMPACT)	38% (4x2) / 37% (4x4)
Speed (Maximum) (Km/h)	20	20	20
Engine starting system エンジン始動システム	Electric.	Electric.	Electric.
Tyres タイヤ	10.0/75-15,3 (rough terrain).	10.0/75-15.3 (C 200 H COMPACT) 11.5/80-15.3 (rough terrain) (C 200/250 H).	12.5/80-18 (rough terrain).
Steering ステアリング	Hydraulic. Working pressure 130 bar.	Hydraulic. Working pressure 135 bar.	Hydraulic. Working pressure 135 bar.
External turning circle (mm) 旋回半径	2550 (4x2) / 4000 (4x4)	2800 (4x2) / 4400 (4x4)	2800 (4x2) / 4400 (4x4)
Tank capacity (l) タンク容量	45	50	50
Service brake サービスブレーキ	Hydraulic.	Oil-immersed, multisc, hydraulically driven	Oil-immersed, multisc, hydraulically driven
Parking brake 駐車ブレーキ	Mechanical.	Oil-immersed, multisc, hydraulically driven	Oil-immersed, multisc, hydraulically driven
Hydraulic circuit 油圧回路	2 gear pump of 10,6 and 6 cc. Working pressure 200 bar.	18-8 cc. double gear pump. Working pressure 180 bar.	18-8 cc. double gear pump. Working pressure 210 bar.
Operating pressures for accessories 作動圧力	200	180	210

STANDARD EQUIPMENT 標準装備

<ul style="list-style-type: none"> Open cabin. Ergonomic seat. Seat belt. Joystick. Rotating beacon. 回転灯 3rd. hydraulic power take-off (PTO) attachment. Side-shift: 1260 mm (width). Active security equipment. Audible reverse warning. バックブザー 	<ul style="list-style-type: none"> Open cabin. Ergonomic seat. Seat belt. Joystick. Rotating beacon. 回転灯 3rd. hydraulic power take-off (PTO) attachment. Side-shift: 1260 mm (width). Active security equipment. Audible reverse warning. バックブザー Chassis mounted integral belly plate. Narrow front axle.
---	--

OPTIONAL EQUIPMENT オプション

<ul style="list-style-type: none"> Semi-closed cabin. Full cabin with heater. Front and rear lights. Tyres: Solid, flotation, industrial. Catalytic converter 触媒コンバーター Spark arrestor. Fuel oil filter with water separator. 4th. hydraulic power take-off (PTO) attachment. 300 litre and 400 litre hydraulic buckets. Load backrest of 1260 mm. 	<ul style="list-style-type: none"> Electronic power cut-off. Semi-closed cabin. Full cabin with heater. Front and rear lights. Tyres: Solid, flotation, industrial. Wide front axle (NO available for C 200 H COMPACT). Catalytic converter. 触媒コンバーター Spark arrestor. Fuel oil filter with water separator. 4th. hydraulic power take-off (PTO) attachment. 400 litre and 600 litre hydraulic buckets. Side-shift: 1600 mm (width). Load backrest of 1260 mm and 1600 mm.
--	--